

INVERTER GENERATOR



- Pure Sine wave output, Direct power supply for smart devices: Drone, Smart phone, Laptop, Digital camera, Ipad...

H2250IS



INVERTER GENERATOR	H2250IS	H3150IS	H6250IE
Rated Power(Kw)	1.8	2.5	5
Max Power(Kw)	2.0	2.8	5.5
Frequency(Hz)	50	50	50
Voltage(V)	220	220	220
12v DC Output	8.3A	8.3A	8.3A
Thd(%)	<2	<3	<3
Fuel Tank Capacity(L)	4	5	11
Running Time@50% Load(H)	8	9	6
Displacement(CC)	79.7	120	223
Oil Capacity(L)	0.35	0.4	0.7
Starting Type	Recoil start	Recoil start	E-start
Noise @50% Load(Dba)	62	64	71
Compliance	CE	CE	CE
Dimensions(mm)	480x285x460	500x295x490	590x390x547
Net Weight(kg)	18	21	39
Loading Quantity(20gp/40hq)	320/830	324/830	168/340

- Pure Sine wave output, Direct power supply for smart devices: Drone, Smart phone, Laptop, Digital camera, Ipad...

H3150IS



INVERTER GENERATOR	H2250IS	H3150IS	H6250IE
Rated Power(Kw)	1.8	2.5	5
Max Power(Kw)	2.0	2.8	5.5
Frequency(Hz)	50	50	50
Voltage(V)	220	220	220
12v DC Output	8.3A	8.3A	8.3A
Thd(%)	<2	<3	<3
Fuel Tank Capacity(L)	4	5	11
Running Time@50% Load(H)	8	9	6
Displacement(CC)	79.7	120	223
Oil Capacity(L)	0.35	0.4	0.7
Starting Type	Recoil start	Recoil start	E-start
Noise @50% Load(Dba)	62	64	71
Compliance	CE	CE	CE
Dimensions(mm)	480x285x460	500x295x490	590x390x547
Net Weight(kg)	18	21	39
Loading Quantity(20gp/40hq)	320/830	324/830	168/340

INVERTER GENERATOR



- Pure Sine wave output, Direct power supply for smart devices: Drone, Smart phone, Laptop, Digital camera, Ipad...

H6250IE



INVERTER GENERATOR	H2250IS	H3150IS	H6250IE
Rated Power(Kw)	1.8	2.5	5
Max Power(Kw)	2.0	2.8	5.5
Frequency(Hz)	50	50	50
Voltage(V)	220	220	220
12v De Output	8.3A	8.3A	8.3A
Thd(%)	<2	<3	<3
Fuel Tank Capacity(L)	4	5	11
Running Time@50% Load(H)	8	9	6
Displacement(CC)	79.7	120	223
Oil Capacity(L)	0.35	0.4	0.7
Starting Type	Recoil start	Recoil start	E-start
Noise @50% Load(Dba)	62	64	71
Compliance	CE	CE	CE
Dimensions(mm)	480x285x460	500x295x490	590x390x547
Net Weight(kg)	18	21	39
Loading Quantity(20gp/40hq)	320/830	324/830	168/340

- Classic design, excellent value for investment, strong fuel tank with gasket.
- Novel industrial design, exquisite craftsmanship with stronger roll-cage.

DP4500SE-GE



Copper Wire



Remote Control



GASOLINE GENERATOR	DP4500SE-GE	DP7500SE-GE	DP9500SE-GE
Rated Voltage(V)	220	220	220
Rated Current(A)	13	23	27
Max.Power(KW)	3.0	5.5	7.5
Rated Power COP(KW)	2.6	5.0	7.0
Phase	1	1	1
Rated Frequency(Hz)	50	50	50
Factor	1	1	1
Insulation Grade	F	F	F
Model	170F	188F	192F
Type	Single Cylinder,Air-cooled,4-stroke	Single Cylinder,Air-cooled,4-stroke	Single Cylinder,Air-cooled,4-stroke
Displacement(cc)	210	389	458
Output Power(HP)	7.0	13.0	15.0
Rated Speed(RPM)	3000	3000	3000
Bore X Stroke	70*56	88*64	92*66
Compression Ratio	8.5	8.0	8.0
Starting System	Electric Starting	Electric Starting	Electric Starting
Fuel Tank Volume(L)	15	25	25
Mass Weight(kg)	45	82	87
Size(LxWxH)(mm)	605*440*440	690*550*550	690*550*550
20FT(set)	235	136	136
40HQ(set)	585	292	292

GASOLINE GENERATOR



- Classic design, excellent value for investment, Strong fuel tank with gasket.
- Novel industrial design, exquisite craftsmanship with stronger roll-cage.

DP7500SE-GE



Copper Wire



Remote Control



GASOLINE GENERATOR	DP4500SE-GE	DP7500SE-GE	DP9500SE-GE
Rated Voltage(V)	220	220	220
Rated Current(A)	13	23	27
Max. Power(Kw)	3.0	5.5	7.5
Rated Power COP(Kw)	2.6	5.0	7.0
Phase	1	1	1
Rated Frequency(Hz)	50	50	50
Factor	1	1	1
Insulation Grade	F	F	F
Model	170F	188F	192F
Type	Single Cylinder,Air-cooled,4-stroke	Single Cylinder,Air-cooled,4-stroke	Single Cylinder,Air-cooled,4-stroke
Displacement(cc)	210	389	458
Output Power(HP)	7.0	13.0	15.0
Rated Speed(RPM)	3000	3000	3000
Bore X Stroke	70*56	88*64	92*66
Compression Ratio	8.5	8.0	8.0
Starting System	Electric Starting	Electric Starting	Electric Starting
Fuel Tank Volume(L)	15	25	25
Mass Weight(kg)	45	82	87
Size(LxWxH)(mm)	605*440*440	690*550*550	690*550*550
20FT(set)	235	136	136
40HQ(set)	585	292	292

- Classic design, excellent value for investment, Strong fuel tank with gasket.
- Novel industrial design, exquisite craftsmanship with stronger roll-cage.

DP9500SE-GE



Copper Wire



Remote Control



GASOLINE GENERATOR	DP4500SE-GE	DP7500SE-GE	DP9500SE-GE
Rated Voltage(V)	220	220	220
Rated Current(A)	13	23	27
Max.Power(Kw)	3.0	5.5	7.5
Rated Power COP(Kw)	2.6	5.0	7.0
Phase	1	1	1
Rated Frequency(Hz)	50	50	50
Factor	1	1	1
Insulation Grade	F	F	F
Model	170F	188F	192F
Type	Single Cylinder,Air-cooled,4-stroke	Single Cylinder,Air-cooled,4-stroke	Single Cylinder,Air-cooled,4-stroke
Displacement(cc)	210	389	458
Output Power(HP)	7.0	13.0	15.0
Rated Speed(RPM)	3000	3000	3000
Bore X Stroke	70*56	88*64	92*66
Compression Ratio	8.5	8.0	8.0
Starting System	Electric Starting	Electric Starting	Electric Starting
Fuel Tank Volume(L)	15	25	25
Mass Weight(kg)	45	82	87
Size(LxWxH)(mm)	605*440*440	690*550*550	690*550*550
20FT(set)	235	136	136
40HQ(set)	585	292	292

DIESEL GENERATOR



- Enhanced Wavy foam and compact design to further reduce noise and volume.
- Knob type maintenance door switch.

DP8500SE-DE



Copper Wire



Remote Control



HJ301



ATS Jack



DIESEL GENERATOR	DP8500SE-DE	DP11000SE-DE	DP13000SE-DE
Rated Frequency(Hz)	50	50	50
Rated Voltage(V)	220	220	220
Max.Power(Kw)	6.0	10.0	11.0
Rated Power(Kw)	5.5	9.0	10.0
Alternator	Copper	Copper	Copper
Factor	1	1	1
Phase	Single Phase		
Starting System	Electric Starting	Electric Starting	Electric Starting
Fuel Tank Volume(L)	16	27	30
Model	188F	195F	1100F
Bore X Stroke	88*75	95*75	100*84
Displacement(cc)	456	531	660
Fuel Consumption Rate	≤280	≤280	≤230
Type	Single-cylinder,vertical,4-stroke,air Cooled diesel engine		
Ignition System	Direct Injection		
Noise Level(dB)	70-73	70-73	70-73
G.W/N.W(kg)	155/144	185/173	220/203
Dimension(mm)	910*550*760	960*550*760	1110*760*930

- Novel industrial design, exquisite craftsmanship with stronger roll-cage.
- Larger front door and removable side panels for easy maintenance.

DP11000SE-DE



Copper Wire



Remote Control



HJ301



ATS Jack



DIESEL GENERATOR	DP8500SE-DE	DP11000SE-DE	DP13000SE-DE
Rated Frequency(Hz)	50	50	50
Rated Voltage(V)	220	220	220
Max.Power(Kw)	6.0	10.0	11.0
Rated Power(Kw)	5.5	9.0	10.0
Alternator	Copper	Copper	Copper
Factor	1	1	1
Phase	Single Phase		
Starting System	Electric Starting	Electric Starting	Electric Starting
Fuel Tank Volume(L)	16	27	30
Model	188F	195F	1100F
Bore X Stroke	88*75	95*75	100*84
Displacement(cc)	456	531	660
Fuel Consumption Rate	≤280	≤280	≤230
Type	Single-cylinder,vertical,4-stroke,air Cooled diesel engine		
Ignition System	Direct Injection		
Noise Level(dB)	70-73	70-73	70-73
G.W/N.W(kg)	155/144	185/173	220/203
Dimension(mm)	910*550*760	960*550*760	1110*760*930

DIESEL GENERATOR



- Novel industrial design, exquisite craftsmanship with stronger roll-cage.
- Larger front door and removable side panels for easy maintenance.

DP13000SE-DE



Copper Wire



Remote Control



HJ301



ATS Jack



DIESEL GENERATOR	DP8500SE-DE	DP11000SE-DE	DP13000SE-DE
Rated Frequency(Hz)	50	50	50
Rated Voltage(V)	220	220	220
Max.Power(Kw)	6.0	10.0	11.0
Rated Power(Kw)	5.5	9.0	10.0
Alternator	Copper	Copper	Copper
Factor	1	1	1
Phase	Single Phase		
Starting System	Electric Starting	Electric Starting	Electric Starting
Fuel Tank Volume(L)	16	27	30
Model	188F	195F	1100F
Bore X Stroke	88*75	95*75	100*84
Displacement(cc)	456	531	660
Fuel Consumption Rate	≤280	≤280	≤230
Type	Single-cylinder,vertical,4-stroke,air Cooled diesel engine		
Ignition System	Direct Injection		
Noise Level(dB)	70-73	70-73	70-73
G.W/N.W(kg)	155/144	185/173	220/203
Dimension(mm)	910*550*760	960*550*760	1110*760*930

- Light weight portable unit with strong roll cage, easily deployed at any work site.
- Anti-corrosion, thickened aluminum pump body with stiffeners.

DP20-WP



WATER PUMP	DP20-WP
Inlet And Outlet Size(mm)	100(2.0")
Pump Lift(m)	28
Suction Height(m)	8
Flux(m ³ /h)	36
Model	168F-1
Type	Single Cylinder,Air-cooled,4-stroke
Displacement(cc)	196
Max Power(Kw)	5.2
Rated Power(Kw)	4.7
Rated Speed(RPM)	3600
Bore X Stroke(mm)	68*54
Compression Ratio	8.5
Fuel Tank Volume(L)	3.6
Mass Weight(kg)	22
Size(LxWxH)(mm)	475*375*395
20FT(Set)	385
40GP(Set)	900



GASOLINE WATER PUMP



- Light weight portable unit with strong roll cage, easily deployed at any work site.
- Anti-corrosion, thickened **cast iron** body with stiffeners.

DP20I-WP




WATER PUMP	DP20I-WP
Inlet And Outlet Size(mm)	63.5(2.5")
Outlet Size(mm)	50(2.0")
Pump Lift(mm)	60
Suction Height(m)	7
Displacement(m ³)	35
Model	170F
Type	4-Stroke, Single-Cylinder, Air Cooled, Direct Injection
Displacement(cc)	210
Power(HP)	7.0
Rated Speed(RPM)	3600
Bore X Stroke(mm)	70*54
Compression Ratio	8.5
Ignition System	T.C.I
Starting system	Recoil
Packing Size(mm)	505*385*425
G.W(kg)	32
20FT(Set)	330
40HQ(Set)	820



- Light weight portable unit with strong roll cage, easily deployed at any work site.
- Anti-corrosion, thickened **cast iron** body with stiffeners.

DP30I-WP

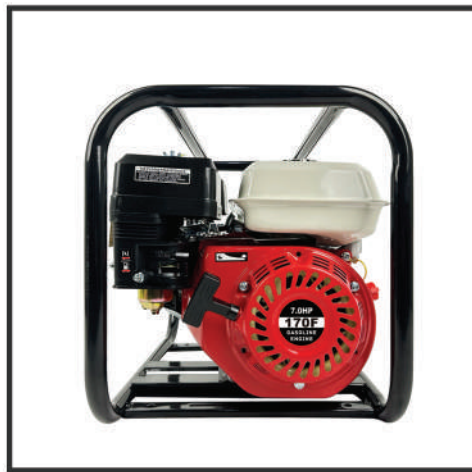

WATER PUMP	DP30I-WP
Inlet And Outlet Size(mm)	80(3.0")
Outlet Size(mm)	80(3.0")
Pump Lift(mm)	35
Suction Height(m)	7
Displacement(m ³)	45
Model	170F
Type	4-Stroke, Single-Cylinder, Air Cooled, Direct Injection
Displacement(cc)	210
Power(HP)	7.0
Rated Speed(RPM)	3600
Bore X Stroke(mm)	70*54
Compression Ratio	8.5
Ignition system	T.C.I
Starting system	Recoil
G. W(kg)	32
Packing Size(mm)	505*385*425
20FT(Set)	385
40HQ(Set)	900

